

AIR SAFE

**Receiver Hitch
Installation/Operation
Instructions
CLASS III**


1-866-41 HITCH

AIR SAFE™

The following instructions should be used to mount **AIRSAFE™ AIR RIDE HITCH®** only. Please **read and follow instructions before installation.** Failure to follow instructions may void the manufacturer's warranty. Max TW 600lbs/Max GTW 6,000lbs.

1. (A) **CLASS III HITCH-** The Hitch's receiver tube plate has four ½" drilled and tapped holes to install receiver tube. The receiver tube may be mounted in two positions to obtain different hitch heights.
2. Mount the ball on the ball mount platform. The ball must have 1" shaft to fit in the hole provided.
3. Slide the hitch's 2" receiver tube into the vehicles 2" receiver tube. Install pin and pin keeper (neither provided) into place
4. Inflate air bag. Align trailer to hitch ball and secure trailer hitch into position. Inflate or deflate the air spring until the ball mount is level/horizontal, the ball mount plate should just touch the top white bump stops. Enough air should be placed in the air springs to keep the ball mount level.
5. Attach safety chains, hook up brake lines, plug up lights and take care of any other safety items.
6. To unhitch the trailer, use trailer jack to raise tongue and unhitch. Periodically grease the pivot rod.

CAUTION: Do not over- inflate the air springs. Never exceed 100 PSI.

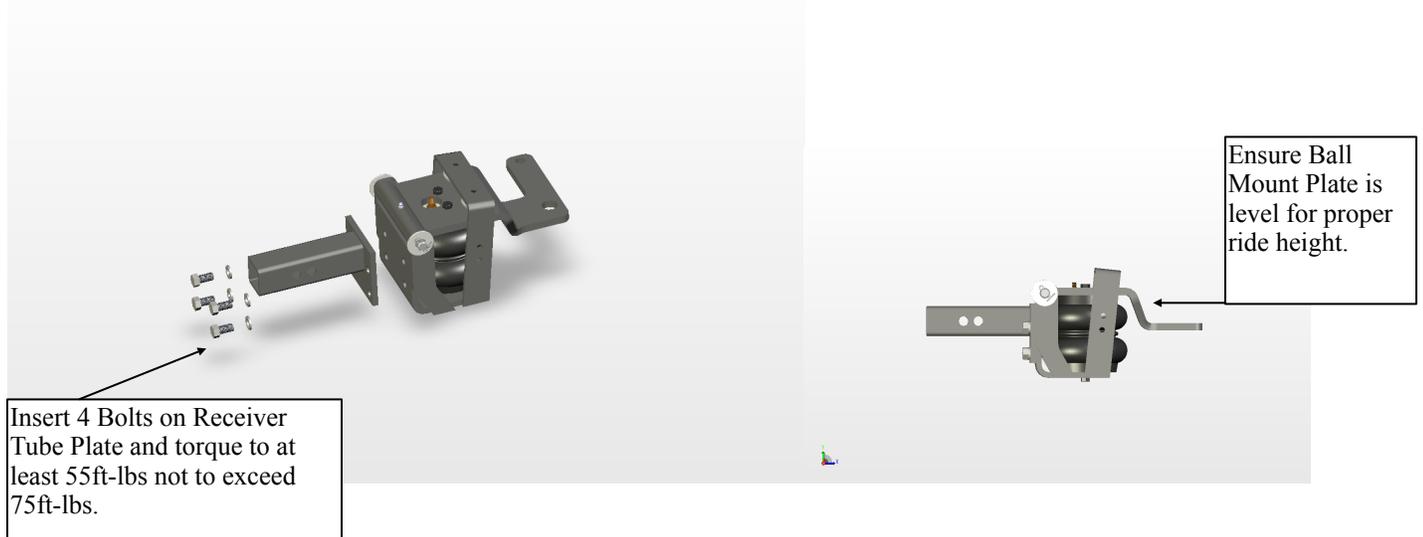

**AIR SAFE
RECEIVER HITCH SYSTEM
*LIMITED 2 YEAR WARRANTY***

The Air Safe Receiver Hitch System is warranted against defects in material and workmanship under normal use and service, ordinary wear and tear excepted, for 2 years from the first date of purchase at retail. Any part found to have a defect in material or workmanship, will be repaired or replaced at the manufacturer's option when returned with transportation charges prepaid. Include a copy of the original sales receipt when returned for warranty. This warranty does not cover the condition, durability or appearance of the finished product.

If the hitch is damaged as a result of improper installation, alteration, vehicle accident, misuse or unreasonable use, including but not limited to , loading the product beyond the factory rated load capacity, the manufacturer shall not be required to repair or replace such product. In every case, this warranty covers only the defective part and does not provide for reimbursement of the retail price of the part or labor charges.

The manufacturer shall not be liable for any incidental or consequential damages for breach of any express or implied warranty.

There are no warranties that extend beyond the description on the face hereof. The manufacturer is extending no other warranties, express or implied, nor any warranties of merchantability or fitness for a particular purpose. Any such warranties of merchantability or fitness for a particular purpose are expressly excluded.

This warranty is designed and intended to fully comply with the requirements of the Magnusson-Moss Warranty Act and all regulations issued by the Federal Trade Commission in connection therewith. It is not intended to violate any state law or regulation containing more stringent requirements, and such requirements automatically become part of this warranty insofar as required by that act.

The owner has available the legal remedies provided by the Magnusson-Moss Warranty Act, Public Law 93-637, 99 STAT. 2183-2193; 15 U.S.Code, Secs 23021-2312, and any applicable state statutes.

For warranty assistance, contact Air Hitch Technology at 1-866-41-HITCH (1-866-414-4824., weekdays 8:00 AM to 5:00 PM (Central)).